


Chemtech Scientific provides access to this content as a courtesy.
 We do not own the content contained in this document.
 All rights and credit go directly to its rightful owners.
www.chemtechsci.com
 Call us at: 484-424-9415



60HZ 50HZ
CFM 106 88

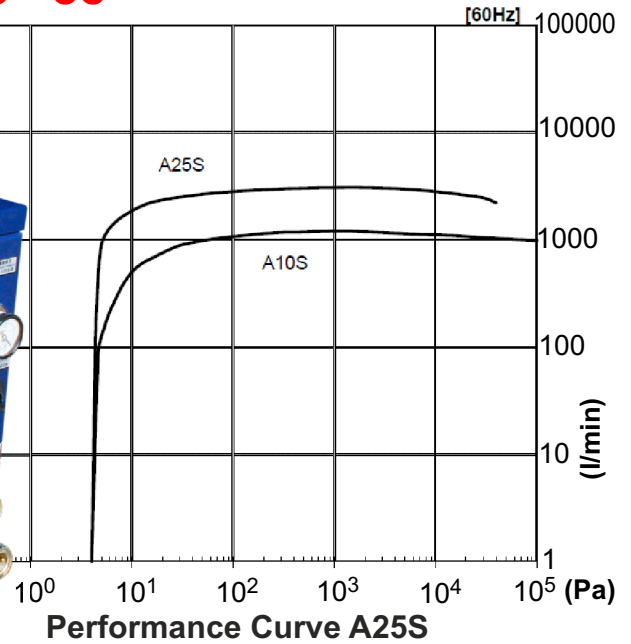

A25S

MULTI-STAGE DRY PUMP

A25S Specifications

Pumping speed (N ₂) 50/60 Hz	l/min.	2500/3000
Pumping speed (N ₂) 50/60 Hz	m ³ /h	150/180= CFM 88/106
Ultimate pressure 50/60 Hz	mbar	5x10 ⁻² , 4x10 ⁻²
Ultimate pressure 50/60 Hz	Pa	5.3/4.0
Water Consumption	l/min.	3.5
Nitrogen Consumption	SLM	10-12
Nitrogen Consumption	Pa m ³ /sec	17-20
Voltages ranges	V	200-220/380-415
Motor power, installed	kW	3.7
Weight, approx.	kg/lbs.	240/528
Sizes (LxWxH)	mm	900x394x470
Inlet flange size		DN 40 KF
Outlet flange size		DN 40 KF

Technical Characteristics

- Complete pump safeguard system
- High pump operating temperature preventing condensation
- Low noise and low vibration
- Corrosion resistant materials-stainless steel coolers, water circuits
- High reliability even for harsh processes
- Efficient interstage coolers for LPCVD nitride process
- Canned motor
- Low service requirements
- Control panel for monitoring operating conditions

Customer Benefits

- Very low nitrogen consumption for purging
- Clean room compatible
- Low service requirements
- Compact size and small footprint

Chemtech Scientific provides access to this content as a courtesy.
We do not own the content contained in this document.
All rights and credit go directly to its rightful owners.
www.chemtechsci.com
Call us at: 484-424-9415

